


The certified sensitive edges for total protection

- A CAME exclusive patent for protection from mechanical risk.
- The right solution for high security and quality levels of the automated system.
- The product complies with standards EN 12978 and EN 954-1.

Dimensions (mm)

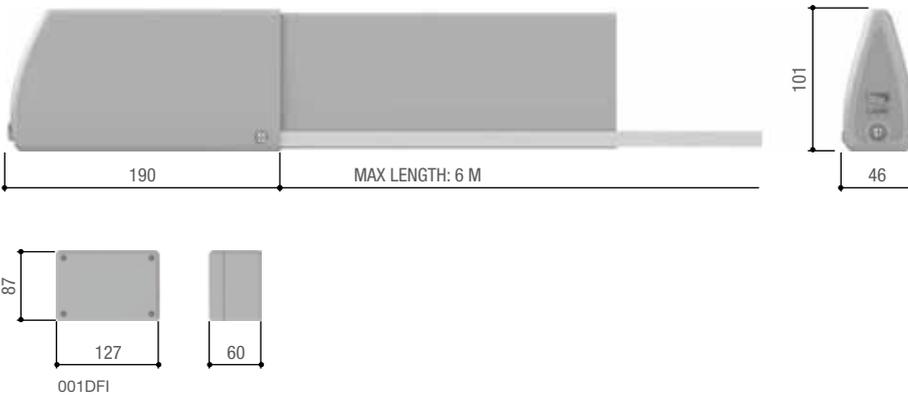

Technical features

MODELS	DF15 • DF17 • DF20 • DF25 • TMF • TMF6
Protection rating (IP)	54
Contact range (A)	3 / 24 V (resistive)
Max speed measured at the edge of the leaf	12
Operating temperature (°C)	-20 ÷ +55
Material	TPE 65 SHORT A

