



# Myto

BELOWGROUND  
AND  
ABOVEGROUND  
OPERATOR FOR  
SWING GATES



**CAME**

# Myto

**The operator is  
“out-of-sight”  
while ease of  
installation and  
functionality  
surface.**

Came presents Myto, the new and easy belowground solution. Flexible, fast, and ready to automate swing gates with single-leaf of up to 1.8 m in width. It is ideal for pre-existing closing systems as it simplifies the installers' job and requires no set up work.



# Reasons to choose Myto

## IT IS OUT-OF-SIGHT, ADAPTABLE AND NON-INVASIVE.

Easy to install, even on pre-existing gates, Myto is the concrete answer to the changing needs in the automation market.

It presents a unique opportunity to offer end-users a simple, flexible solution, without hidden costs or complicated modifications to gates.

All it takes is 10 cm of foundation space to position this revolutionary, new gearmotor, with its safe, reliable and sturdy mechanics.

### STRONG POINTS:

**Installers** needn't remove gate leaves or perform challenging masonry work. This leads to remarkable cost savings. The evolved EN Tested technology makes for easy, on-site compliance Certification, which streamlines the procedure while ensuring safety thanks to the strict European Regulations compliance.

It is a sure selling point, and an added value to the professional installers', who can now offer exclusive service, top credibility and reliability.

**Users** can now automate their gates in complete safety, without any invasive or costly jobs to perform, even in unsuitable conditions. And if the application context so requires, Myto can be installed above-ground, no holes or pits required by the box.

**It couldn't be any simpler!**

## EXTRA ARM-STRENGTH TO HELP YOUR WORK!

Sleek and compact, Myto's special transmission arm is engineered to fit where there is very little space available, especially against lateral walls or fences. Its sled and mechanical endstops allow sure and quick setting of the gate-leaf opening and closing stop positions.

ALL OF MYTO'S FLEXIBILITY AS SURE RESPONSE TO DIFFERENT INSTALLATION NEEDS.




Below-ground motor, positioned to the side (when space is an issue).



Above-ground motor, positioned to the side (when space is an issue).



Below-ground motor in standard position.



Above-ground motor in standard position.

MYTO DISPELS ANY SPACE ISSUES.



# Myto

## electronics and technology

In addition to its standard command and safety functions, Myto's new electronics bring numerous new features that enable total control of the automation and unique optimisation of the service.

**Display** to view function programming.

Warning **Leds** built into the control board, provide quick diagnosis of the system.

**Self-diagnosing** safety devices.

ENCODER-based **electronics manage** obstacle detection.

ENCODER-based **endstop control**, to easily manage movement and slow-down phases.

**Simplified installation**: requires only one, three-conductor cable to handle power source and slow-downs.

**Memorisation of the transmitters** using different codes (up to 250 users).

## AUTHENTIC ITALIAN QUALITY.

The 100% Made in Italy originality mark testifies that Myto, like the rest of the Came product range, stems from a quality manufacturing process, engineered to generate technologically reliable and efficient products. These are tested for wear and tear for an equivalent period of 10 to 15 years of intense activity. They are also tested for extreme temperature resistance (lows of -40°C to highs of +80°C). Specific tests also check how the device functions with any electromagnetic interference. That's why, if properly installed, Myto lasts longer and is problem-free even in severe weather conditions.

All this means authority and prestige to the installer, and safety and peace of mind to the users.

## INTENSIVE USE, BLACKOUTS GOODBYE.

The 24 V DC motor is perfect for intensive use conditions. Not only: Myto's 24 V electronics can be coupled with an emergency card, which in case of blackouts, immediately detects the power cut and activates the auxiliary batteries which are stored within the gearmotor assembly.










## EN TESTED: NO COMPROMISE WHEN IT COMES TO SAFETY.

Myto is an EN Tested automation, that is, it is manufactured and tested according to the rigorous criteria set out by the current European Regulations concerning impact forces. Thanks to this, the device can readily be certified on site by installers. Essentially Myto's dedicated control panel constantly monitors gate-leaf movement via the ENCODER, yielding a safe thrust, in compliance with current technical regulations EN 12445 and EN 12453. Any contact with possible obstacles, triggers a special electric circuit which stops the gate leaves and inverts their direction of movement.




# The Myto range


24 V DC external operator and control panels - tested in compliance with EN 12453 - EN 12445

001MYTO-ME	Operator with encoder for gate leaves up to 1.8 m.	  
002ZLJ14	Multifunction control panel for one-leaf swing gates featuring warning display, self-diagnosing safety devices and built-in radio decoder.	 
002ZL92	Control panel for two-leaf swing gates with function programming display, self-diagnosing safety devices and built-in radio decoder.	 
002ZLJ24	Multifunction control panel for two-leaf swing gates featuring warning display, self-diagnosing safety devices and built-in radio decoder.	 

#### Accessories for: 002ZL92 et 002ZLJ14

002LB90	Card for connecting n. 2 12 V – 1.2 Ah emergency batteries.	
---------	---	---

#### Accessories for: 002ZLJ24

002LB180	Card for connecting n. 2 12 V – 1.2 Ah emergency batteries.	
----------	---	---

#### Accessories


001MYTO-C	Casing for external fixing or underground installation.
001MYTO-BD	Transmission arm and slide guide.



## Limits to use

MODEL	MYTO-ME
Max width of gate leaf (m/ft)	1,8/6
Max weight of gate leaf (Kg/lb)	200/440
Max opening of gate leaf (°)	125

● 24 V DC

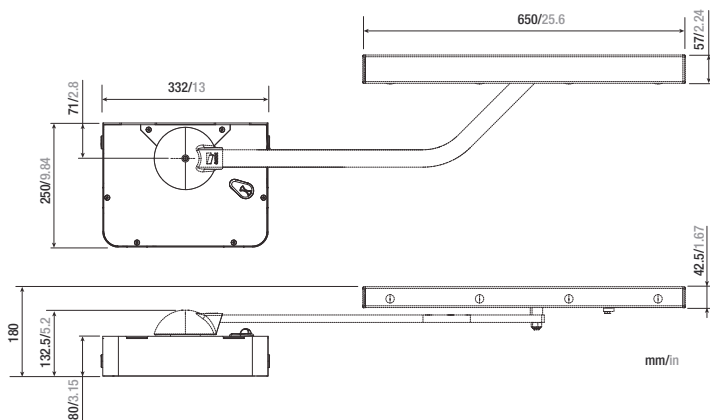

## Technical features

TYPE	MYTO-ME
Protection rating	IP67
Power supply (V - 50/60 Hz)	230 AC
Motor power supply (V - 50/60 Hz)	24 DC
Current draw (A)	10 MAX
Power (W)	240
90° opening time (s)	ADJUSTABLE
Duty cycle (%)	INTENSIVE USE
Thrust (Nm)	260
Operating temperature (°C)	-20 ÷ +55
Motor's thermo-protection (°C)	-

● 24 V DC

**FIND OUT WHAT'S  
NEW WITH CAME**  
from your wholesaler  
or from [came.com](http://came.com)



Stylo



Mio

PRODUCTS



**Came cancelli automatici s.p.a.**

Via Martiri della Libertà, 15  
31030 Dosson di Casier  
Treviso - Italy  
Tel. (+39) 0422 4940  
Fax (+39) 0422 4941  
info@came.it  
www.came.com



**CAME**